

S5730-HI Series Next-Generation Gigabit Agile Switches


The recently developed S5730-HI series switches are Huawei's next-generation agile switches that provide all-gigabit access and 10GE uplink ports and come with extended slots for expansion of uplink ports.

Product Overview

The S5730-HI series switches (S5730-HI) are the next-generation agile fixed switches developed by Huawei. The S5730-HI builds on Huawei's unified Versatile Routing Platform (VRP) and boasts various IDN-Ready features. For example, the integrated wireless AC capabilities can manage up to 1K wireless APs; the free mobility feature ensures consistent user experience; the VXLAN functionality implements network virtualization; and built-in security probes support abnormal traffic detection, threat analysis even in encrypted traffic, and network-wide threat deception. With these merits, the S5730-HI is ideal for branches of medium- and large-sized campus networks, the core layer of small-sized campus networks, and the access layer of data center networks.

Models and Appearances

The following models are available in the S5730-HI series.

| Models and Appearances | Description |
|---|---|
|  S5730-36C-HI | <ul style="list-style-type: none"> • 24 10/100/1000Base-T Ethernet ports, 4 10GE SFP+ ports • One extended slot • 1+1 power backup, with AC, DC, or AC+DC power supply • Switching capacity: 758 Gbit/s |
|  S5730-36C-PWH-HI | <ul style="list-style-type: none"> • 24 10/100/1000Base-T Ethernet ports, 4 10GE SFP+ ports • One extended slot • 1+1 power backup, with AC, DC, or AC+DC power supply • PoE++ • Switching capacity: 758 Gbit/s |
|  S5730-36C-HI-24S | <ul style="list-style-type: none"> • 24 GE SFP ports, 8 of which are dual-purpose 10/100/1000 or SFP, 4 10GE SFP+ ports • One extended slot • 1+1 power backup, with AC, DC, or AC+DC power supply • Switching capacity: 758 Gbit/s |
|  S5730-44C-HI | <ul style="list-style-type: none"> • 24 10/100/1000Base-T Ethernet ports, 4 10GE SFP+ ports • Two extended slots • 1+1 power backup, with AC, DC, or AC+DC power supply |

| Models and Appearances | Description |
|---|---|
|  S5730-44C-PWH-HI | <ul style="list-style-type: none"> • Switching capacity: 758 Gbit/s • 24 10/100/1000Base-T Ethernet ports, 4 10GE SFP+ ports • Two extended slots • 1+1 power backup, with AC, DC, or AC+DC power supply • PoE++ • Switching capacity: 758 Gbit/s |
|  S5730-44C-HI-24S | <ul style="list-style-type: none"> • 24 GE SFP ports, 8 of which are dual-purpose 10/100/1000 or SFP, 4 10GE SFP+ ports • Two extended slots • 1+1 power backup, with AC, DC, or AC+DC power supply • Switching capacity: 758 Gbit/s |
|  S5730-60C-HI | <ul style="list-style-type: none"> • 48 10/100/1000Base-T Ethernet ports, 4 10GE SFP+ ports • One extended slot • 1+1 power backup, with AC, DC, or AC+DC power supply • Switching capacity: 758 Gbit/s |
|  S5730-60C-PWH-HI | <ul style="list-style-type: none"> • 48 10/100/1000Base-T Ethernet ports, 4 10GE SFP+ ports • One extended slot • 1+1 power backup, with AC, DC, or AC+DC power supply • PoE++ • Switching capacity: 758 Gbit/s |
|  S5730-60C-HI-48S | <ul style="list-style-type: none"> • 48 GE SFP, 4 10GE SFP+ ports • One extended slot • 1+1 power backup, with AC, DC, or AC+DC power supply • Switching capacity: 758 Gbit/s |
|  S5730-68C-HI | <ul style="list-style-type: none"> • 48 10/100/1000Base-T Ethernet ports, 4 10GE SFP+ ports • Two extended slots • 1+1 power backup, with AC, DC, or AC+DC power supply • Switching capacity: 758 Gbit/s |
|  S5730-68C-PWH-HI | <ul style="list-style-type: none"> • 48 10/100/1000Base-T Ethernet ports, 4 10GE SFP+ ports • Two extended slots • 1+1 power backup, with AC, DC, or AC+DC power supply • PoE++ • Switching capacity: 758 Gbit/s |
|  S5730-68C-HI-48S | <ul style="list-style-type: none"> • 48 GE SFP, 4 10GE SFP+ ports • Two extended slots • 1+1 power backup, with AC, DC, or AC+DC power supply • Switching capacity: 758 Gbit/s |

Features and Highlights

Enabling Networks to Be More Agile for Services

- S5730-HI has a built-in high-speed and flexible processor chip. The chip's flexible packet processing and traffic control capabilities can meet current and future service requirements, helping build a highly scalable network.
- In addition to capabilities of traditional switches, the S5730-HI provides open interfaces and supports user-defined forwarding behavior. Enterprises can use the open interfaces to develop new protocols and functions independently or jointly with equipment vendors to build campus networks meeting their own needs.
- S5730-HI series switches, on which enterprises can define their own forwarding models, forwarding behavior, and lookup algorithms. Microcode programmability makes it possible to provide new services within six months, without the need of replacing the hardware. In contrast, traditional ASIC chips use a fixed forwarding architecture and follow a fixed forwarding process. For this reason, new services cannot be provisioned until new hardware is developed to support the services one to three years later.

Delivering Abundant Services More Agilely

- This S5730-HI provides the integrated WLAN AC function that can manage 1,000 APs, reducing the costs of purchasing additional WLAN AC hardware. The wireless forwarding performance reaches up to 543 Gbit/s, breaking the forwarding performance bottleneck of an external WLAN AC. With this switch series, customers can stay ahead in the high-speed wireless era.

NOTE

The wireless forwarding performance is calculated based on 1024-byte packets.

- With the unified user management function, the S5730-HI authenticates both wired and wireless users, ensuring a consistent user experience no matter whether they are connected to the network through wired or wireless access devices. The unified user management function supports various authentication methods, including 802.1x, MAC address, and Portal authentication, and is capable of managing users based on user groups, domains, and time ranges. These functions visualize user and service management and boost the transformation from device-centric management to user-centric management.
- The S5730-HI provides excellent quality of service(QoS) capabilities and supports queue scheduling and congestion control algorithms. Additionally, it adopts innovative priority queuing and multi-level scheduling mechanisms to implement fine-grained scheduling of data flows, meeting service quality requirements of different user terminals and services.

Providing Fine Granular Network Management More Agilely

- The S5730-HI uses the Packet Conservation Algorithm for Internet(iPCA) technology that changes the traditional method of using simulated traffic for fault location. iPCA technology can monitor network quality for any service flow anywhere and anytime, without extra costs. It can detect temporary service interruptions in a very short time and can identify faulty ports accurately. This cutting-edge fault detection technology turns "extensive management" to "fine granular management."
- The S5730-HI supports Two-Way Active Measurement Protocol(TWAMP) to accurately check any IP link and obtain the entire network's IP performance. This protocol eliminates the need of using a dedicated probe or a proprietary protocol.
- The S5730-HI supports SVF and functions as a parent switch. With this virtualization technology, a physical network with the "Small-sized core/aggregation switches + Access switches + APs" structure can be virtualized into a "super switch", offering the industry's simplest network management solution.
- With the Easy Deploy function, the S5730-HI manages access switches in a similar way an AC manages APs. In deployment, access switches and APs can go online with zero-touch configuration. In the Easy Deploy solution, the Commander collects topology information about the connected clients and stores the clients' startup information based on the topology. Clients can be replaced with zero-touch configuration. The Commander can deliver configurations and scripts to clients in batches and query the delivery results. In addition, the Commander can collect and display information about power consumption on the entire network.

Comprehensive VPN Technologies

- The S5730-HI supports the MPLS function, and can be used as access devices of high-quality enterprise leased line.
- The S5730-HI allows users in different VPNs to connect to the same switch and isolates users through multi-instance routing. Users in multiple VPNs connect to a provider edge(PE) device through the same physical port on the switch, which reduces the cost on VPN network deployment.

Flexible Ethernet Networking

- In addition to traditional Spanning Tree Protocol(STP), Rapid Spanning Tree Protocol(RSTP), and Multiple Spanning Tree Protocol(MSTP), the S5730-HI supports Huawei-developed Smart Ethernet Protection(SEP) technology and the latest Ethernet Ring Protection Switching(ERPS) standard. SEP is a ring protection protocol specific to the Ethernet link layer, and applies to various ring network topologies, such as open ring topology, closed ring topology, and cascading ring topology. This protocol is reliable, easy to maintain, and implements fast protection switching within 50 ms. ERPS is defined in ITU-T G.8032. It implements millisecond-level protection switching based on traditional Ethernet MAC and bridging functions.
- The S5730-HI supports Smart Link and Virtual Router Redundancy Protocol(VRRP), which implement backup of uplinks. One S5730-HI switch can connect to multiple aggregation switches through multiple links, significantly improving reliability of access devices.
- The S5730-HI has large entry sizes and 512MB buffers, coping with the fast growth of data volume in the big data era. With the support for 256K MAC addresses, 512K FIB entries, the S5730-HI meets the requirements of educational networks and metro area networks and allows the access of a large number of terminals. The S5730-HI is the best choice in cloud computing era.

Various Security Control Methods

- The S5730-HI supports 802.1x authentication, MAC address authentication, Portal authentication, and hybrid authentication, and can dynamically delivery user policies such as VLANs, QoS policies, and access control lists(ACL). It also supports user management based on user groups.
- The S5730-HI provides a series of mechanisms to defend against DoS and user-targeted attacks. DoS attacks are targeted at switches and include SYN flood, Land, Smurf, and ICMP flood attacks. User-targeted attacks include bogus DHCP server attacks, IP/MAC address spoofing, DHCP request flood, and change of the DHCP CHADDR value.
- The S5730-HI sets up and maintains a DHCP snooping binding table, and discards the packets that do not match the table entries. You can specify DHCP snooping trusted and untrusted ports to ensure that users connect only to the authorized DHCP server.
- The S5730-HI supports strict ARP learning, which prevents ARP spoofing attackers from exhausting ARP entries.

Mature IPv6 Features

- The S5730-HI is developed based on the mature, stable VRP and supports IPv4/IPv6 dual stacks, IPv6 routing protocols (RIPng, OSPFv3, BGP4+, and IS-IS for IPv6). With these IPv6 features, the S5730-HI can be deployed on a pure IPv4 network, a pure IPv6 network, or a shared IPv4/IPv6 network, helping achieve IPv4-to-IPv6 transition.

Intelligent Stack (iStack)

- The S5730-HI supports the iStack function that combines multiple switches into a logical switch. Member switches in a stack implement redundancy backup to improve device reliability and use inter-device link aggregation to improve link reliability. iStack provides high network scalability. You can increase a stack's ports, bandwidth, and processing capacity by simply adding member switches. iStack also simplifies device configuration and management. After a stack is set up, up to nine physical switches can be virtualized into one logical device. You can log in to any member switch in the stack to manage all the member switches in the stack.

PoE Power Supply

- PoE++ Power Supply: The S5730-HI series PoE switches provide a maximum of 60 W PoE output power on a single interface, and can provide power for high-power terminals such as APs and surveillance cameras. This solves the problem of power supply in specific scenarios.
- Perpetual PoE: When a PoE switch is rebooted after the software version is upgraded, the power supply to PDs is not interrupted. This capability ensures that PDs are not powered off during the switch reboot.
- Fast PoE: PoE switches can supply power to PDs within 10s after they are powered on. This is different from common switches that generally take 1 to 3 minutes to start to supply power to PDs. When a PoE switch reboots due to a power failure, the PoE switch continues to supply power to the PDs immediately after being powered on without waiting until it finishes reboot. This greatly shortens the power failure time of PDs.

VXLAN Features

- VXLAN is used to construct a Unified Virtual Fabric(UVF). As such, multiple service networks or tenant networks can be deployed on the same physical network, and service and tenant networks are isolated from each other. This capability truly

achieves 'one network for multiple purposes'. The resulting benefits include enabling data transmission of different services or customers, reducing the network construction costs, and improving network resource utilization.

- The S5730-HI series switches are VXLAN-capable and allow centralized and distributed VXLAN gateway deployment modes. These switches also support the BGP EVPN protocol for dynamically establishing VXLAN tunnels and can be configured using NETCONF/YANG.

Big Data Security Collaboration

- Agile switches use NetStream to collect campus network data and then report such data to the Huawei Cybersecurity Intelligence System(CIS). The purposes of doing so are to detect network security threats, display the security posture across the entire network, and enable automated or manual response to security threats. The CIS delivers the security policies to the Agile Controller. The Agile Controller then delivers such policies to agile switches that will handle security events accordingly. All these ensure campus network security.
- The S5730-HI supports Encrypted Communication Analytics(ECA). It uses built-in ECA probes to extract characteristics of encrypted streams based on NetStream sampling and Service Awareness(SA), generates metadata, and reports the metadata to Huawei Cybersecurity Intelligence System(CIS). The CIS uses the AI algorithm to train the traffic model and compare characteristics of extracted encrypted traffic to identify malicious traffic. The CIS displays detection results on the GUI, provides threat handling suggestions, and automatically isolates threats with the Agile Controller to ensure campus network security.
- The S5730-HI supports deception. It functions as a sensor to detect threats such as IP address scanning and port scanning on a network and lures threat traffic to the honeypot for further checks. The honeypot performs in-depth interaction with the initiator of the threat traffic, records various application-layer attack methods of the initiator, and reports security logs to the CIS. The CIS analyzes security logs. If the CIS determines that the suspicious traffic is an attack, it generates an alarm and provides handling suggestions. After the administrator confirms the alarm, the CIS delivers a policy to the Agile Controller. The Agile Controller delivers the policy to the switch for security event processing, ensuring campus network security.

Open Programmability System(OPS)

- Open Programmability System(OPS) is an open programmable system based on the Python language. IT administrators can program the O&M functions of a switch through Python scripts to quickly innovate functions and implement intelligent O&M.

Adapting to Network Evolution

- The S5730HI series switches provide a buffer size of 4 GB and an SSD storage card slot(240 GB) for VNF evolution.

Intelligent Upgrade

- Switches support the intelligent upgrade feature. Specifically, switches obtain the version upgrade path and download the newest version for upgrade from the Huawei Online Upgrade Platform (HOUP). The entire upgrade process is highly automated and achieves one-click upgrade. In addition, preloading the version is supported, which greatly shortens the upgrade time and service interruption time.
- The intelligent upgrade feature greatly simplifies device upgrade operations and makes it possible for the customer to upgrade the version independently. This greatly reduces the customer's maintenance costs. In addition, the upgrade policies on the HOUP platform standardize the upgrade operations, which greatly reduces the risk of upgrade failures.

Intelligent O&M

- The S5730-HI provides telemetry technology to collect device data in real time and send the data to Huawei campus network analyzer CampusInsight. The CampusInsight analyzes network data based on the intelligent fault identification algorithm, accurately displays the real-time network status, effectively demarcates and locates faults in a timely manner, and identifies network problems that affect user experience, accurately guaranteeing user experience.
- The S5730-HI supports a variety of intelligent O&M features for audio and video services, including the enhanced Media Delivery Index (eMDI). With this eMDI function, the switch can function as a monitored node to periodically conduct statistics and report audio and video service indicators to the CampusInsight platform. In this way, the CampusInsight platform can quickly demarcate audio and video service quality faults based on the results of multiple monitored nodes.

Product Specifications

| Item | S5730-36C-HI | S5730-36C-PWH-HI | S5730-44C-HI | S5730-44C-PWH-HI |
|------|--------------|------------------|--------------|------------------|
|------|--------------|------------------|--------------|------------------|

| Item | S5730-36C-HI | S5730-36C-PWH-HI | S5730-44C-HI | S5730-44C-PWH-HI |
|---|---|--|---|--|
| Fixed port | 24 10/100/1000Base-T ports, 4 10GE SFP+ ports | 24 10/100/1000Base-T (PoE++) ports, 4 10GE SFP+ ports | 24 10/100/1000Base-T ports, 4 10GE SFP+ ports | 24 10/100/1000Base-T (PoE++) ports, 4 10GE SFP+ ports |
| Dimensions (W x D x H) | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm |
| Extended slot | One extended slot, supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | One extended slot, supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | Two extended slots(one of them is reserved), supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | Two extended slots(one of them is reserved), supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card |
| Input voltage | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz |
| | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC |
| Maximum power consumption (without cards) | 74 W | 500 W AC/650 W DC: <ul style="list-style-type: none">• 90 W (without PDs);• 815 W (with PDs, PDs: 739.2 W) 1150 W AC: <ul style="list-style-type: none">• 105.9 W (without PDs);• 1595 W (with PDs, PDs: 1440 W) | 76.5 W | 500 W AC/650 W DC: <ul style="list-style-type: none">• 94 W (without PDs);• 830 W (with PDs, PDs: 739.2 W) 1150 W AC: <ul style="list-style-type: none">• 107.6 W (without PDs);• 1596 W (with PDs, PDs: 1440 W) |
| Operating temperature | <ul style="list-style-type: none">• 0-1800 m altitude: 0°C to 45°C• 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none">• 0-1800 m altitude: 0°C to 45°C• 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none">• 0-1800 m altitude: 0°C to 45°C• 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none">• 0-1800 m altitude: 0°C to 45°C• 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. |
| Relative humidity | 5% to 95% (non-condensing) | 5% to 95% (non-condensing) | 5% to 95% (non-condensing) | 5% to 95% (non-condensing) |
| Heat dissipation | Air cooling heat dissipation, intelligent speed adjustment, and pluggable fans | Air cooling heat dissipation, intelligent speed adjustment, and pluggable fans | Air cooling heat dissipation, intelligent speed adjustment, and built-in fans | Air cooling heat dissipation, intelligent speed adjustment, and built-in fans |

| Item | S5730-60C-HI | S5730-60C-PWH-HI | S5730-68C-HI | S5730-68C-PWH-HI |
|---|--|---|--|---|
| Fixed port | 48 10/100/1000Base-T ports, 4 10GE SFP+ ports | 48 10/100/1000Base-T(PoE++) ports, 4 10GE SFP+ ports | 48 10/100/1000Base-T ports, 4 10GE SFP+ ports | 48 10/100/1000Base-T(PoE++) ports, 4 10GE SFP+ ports |
| Dimensions(W x D x H) | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm |
| Extended slot | One extended slot, supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | One extended slot, supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | Two extended slots(one of them is reserved), supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | Two extended slots(one of them is reserved), supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card |
| Input voltage | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz |
| | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC |
| Maximum power consumption (without cards) | 87.7 W | 500 W AC/650 W DC: <ul style="list-style-type: none"> • 106 W(without PDs); • 830 W(with PDs, PDs: 739.2 W) 1150 W AC: <ul style="list-style-type: none"> • 119.7 W(without PDs); • 1610 W(with PDs, PDs: 1440 W) | 88.05 W | 500 W AC/650 W DC: <ul style="list-style-type: none"> • 106 W(without PDs); • 830 W(with PDs: 739.2 W); 1150 W AC: <ul style="list-style-type: none"> • 116.3 W(without PDs); • 1608 W(with PDs, PDs: 1440 W) |
| Operating temperature | <ul style="list-style-type: none"> • 0-1800 m altitude: 0°C to 45°C • 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none"> • 0-1800 m altitude: 0°C to 45°C • 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none"> • 0-1800 m altitude: 0°C to 45°C • 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none"> • 0-1800 m altitude: 0°C to 45°C • 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. |
| Relative humidity | 5% to 95%(non-condensing) | 5% to 95%(non-condensing) | 5% to 95%(non-condensing) | 5% to 95%(non-condensing) |
| Heat dissipation | Air cooling heat dissipation, intelligent speed adjustment, and | Air cooling heat dissipation, intelligent speed adjustment, and | Air cooling heat dissipation, intelligent speed adjustment, and | Air cooling heat dissipation, intelligent speed adjustment, and |

| Item | S5730-60C-HI | S5730-60C-PWH-HI | S5730-68C-HI | S5730-68C-PWH-HI |
|------|----------------|------------------|-------------------|------------------|
| | pluggable fans | pluggable fans | and built-in fans | built-in fans |

| Item | S5730-36C-HI-24S | S5730-44C-HI-24S | S5730-60C-HI-48S | S5730-68C-HI-48S |
|-----------------------|--|--|--|--|
| Fixed port | 24 GE SFP ports, 8 of which are dual-purpose 10/100/1000 or SFP, 4 10GE SFP+ ports | 24 GE SFP ports, 8 of which are dual-purpose 10/100/1000 or SFP, 4 10GE SFP+ ports | 48 GE SFP ports, 4 10GE SFP+ ports | 48 GE SFP ports, 4 10GE SFP+ ports |
| Dimensions(W x D x H) | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm | 442 mm x 420 mm x 44.4 mm |
| Extended slot | One extended slot, supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | Two extended slots(one of them is reserved), supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | One extended slot, supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card | Two extended slots(one of them is reserved), supporting 8-port 10GE electrical, 8-port 10GE optical, or 2-port 40GE optical interface card |
| Input voltage | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz | AC: Rated AC voltage: 100 V AC to 240 V AC; 50/60 Hz Max. AC voltage: 90 V AC to 264 V AC; 47-63 Hz |
| | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC | DC: Rated DC voltage: -48 V DC to -60 V DC Max. DC voltage: -38.4 V DC to -72 V DC |
| Power consumption | 66 W | 64 W | 100 W | 100 W |
| Operating temperature | <ul style="list-style-type: none"> 0-1800 m altitude: 0°C to 45°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none"> 0-1800 m altitude: 0°C to 45°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none"> 0-1800 m altitude: 0°C to 45°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. | <ul style="list-style-type: none"> 0-1800 m altitude: 0°C to 45°C 1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m. |
| Relative humidity | 5% to 95%(non-condensing) | 5% to 95%(non-condensing) | 5% to 95%(non-condensing) | 5% to 95%(non-condensing) |
| Heat dissipation | Air cooling heat dissipation and intelligent speed adjustment | Air cooling heat dissipation and intelligent speed adjustment | Air cooling heat dissipation and intelligent speed adjustment | Air cooling heat dissipation and intelligent speed adjustment |

Service Features

| Feature | Description |
|--------------------------|--|
| MAC address table | IEEE 802.1d standards compliance |
| | 256K MAC address entries |
| | MAC address learning and aging |
| | Static, dynamic, and blackhole MAC address entries |
| | Packet filtering based on source MAC addresses |
| VLAN | 4094 VLANs |
| | Guest VLAN and voice VLAN |
| | GVRP |
| | MUX VLAN |
| | VLAN assignment based on MAC addresses, protocols, IP subnets, policies, and ports |
| | VLAN mapping |
| Wireless service | AP access control, AP domain management, and AP configuration template management |
| | Radio management, unified static configuration, and dynamic centralized management |
| | WLAN basic services, QoS, security, and user management |
| | CAPWAP, tag/terminal location, and spectrum analysis |
| Ethernet loop protection | RRPP ring topology and RRPP multi-instance |
| | Smart Link tree topology and Smart Link multi-instance, providing millisecond-level protection switching |
| | SEP |
| | ERPS(G.8032) |
| | BFD for OSPF, BFD for IS-IS, BFD for VRRP, and BFD for PIM |
| | STP(IEEE 802.1d), RSTP(IEEE 802.1w), and MSTP(IEEE 802.1s) |
| | BPDU protection, root protection, and loop protection |
| MPLS | MPLS L3VPN |
| | MPLS L2VPN(VPWS/VPLS) |
| | MPLS-TE |
| | MPLS QoS |
| IP routing | Static routes, RIP v1/2, RIPng, OSPF, OSPFv3, IS-IS, IS-ISv6, BGP, BGP4+, ECMP, routing policy |
| Interoperability | VLAN-Based Spanning Tree(VBST), working with PVST, PVST+, and RPVST |
| | Link-type Negotiation Protocol(LNP), similar to DTP |
| | VLAN Central Management Protocol(VCMP), similar to VTP |
| IPv6 features | Neighbor Discover(ND) |

| Feature | Description |
|-----------|--|
| | <p>PMTU</p> <p>IPv6 Ping, IPv6 Tracert, and IPv6 Telnet</p> <p>ACLs based on source IPv6 addresses, destination IPv6 addresses, Layer 4 ports, or protocol types</p> <p>Multicast Listener Discovery snooping(MLDv1/v2)</p> <p>IPv6 addresses configured for sub-interfaces, VRRP6, DHCPv6, and L3VPN</p> |
| Multicast | <p>IGMP v1/v2/v3 snooping and IGMP fast leave</p> <p>Multicast forwarding in a VLAN and multicast replication between VLANs</p> <p>Multicast load balancing among member ports of a trunk</p> <p>Controllable multicast</p> <p>Port-based multicast traffic statistics</p> <p>IGMP v1/v2/v3, PIM-SM, PIM-DM, and PIM-SSM</p> <p>MSDP</p> <p>MVPN</p> |
| QoS/ACL | <p>Rate limiting in the inbound and outbound directions of a port</p> <p>Packet redirection</p> <p>Port-based traffic policing and two-rate three-color CAR</p> <p>Eight queues per port</p> <p>DRR, SP and DRR+SP queue scheduling algorithms</p> <p>WRED</p> <p>Re-marking of the 802.1p and DSCP fields of packets</p> <p>Packet filtering at Layer 2 to Layer 4, filtering out invalid frames based on the source MAC address, destination MAC address, source IP address, destination IP address, TCP/UDP port number, protocol type, and VLAN ID</p> <p>Queue-based rate limiting and shaping on ports</p> |
| Security | <p>Hierarchical user management and password protection</p> <p>DoS attack defense, ARP attack defense, and ICMP attack defense</p> <p>Binding of the IP address, MAC address, port number, and VLAN ID</p> <p>Port isolation, port security, and sticky MAC</p> <p>MAC Forced Forwarding(MFF)</p> <p>Blackhole MAC address entries</p> <p>Limit on the number of learned MAC addresses</p> <p>IEEE 802.1x authentication and limit on the number of users on a port</p> <p>AAA authentication, RADIUS authentication, and HWTACACS authentication</p> <p>NAC</p> <p>SSH V2.0</p> |


| Feature | Description |
|----------------------------|--|
| | HTTPS CPU protection Blacklist and whitelist Attack source tracing and punishment for IPv6 packets such as ND, DHCPv6, and MLD packets Secure Boot IPSec ECA Deception |
| Reliability | LACP E-trunk Ethernet OAM(IEEE 802.3ah and IEEE 802.1ag) ITU-Y.1731 DLDP LLDP BFD for BGP, BFD for IS-IS, BFD for OSPF, BFD for static route |
| VXLAN | VXLAN L2 and L3 gateways Centralized and distributed gateway BGP-EVPN Configured through the NETCONF protocol |
| Super Virtual Fabric(SVF) | Working as an SVF Parent to vertically virtualize downlink switches and APs as one device for management. A two-layer client architecture is supported. IGMP snooping can be enabled on access switches (ASs) and the maximum number of access users on a port can be configured. ASs can be independently configured. Services that are not supported by templates can be configured on the parent. Third-party devices are allowed between SVF parent and clients. Working as an SVF client that is plug-and-play with zero configuration |
| iPCA | Directly coloring service packets to collect real-time statistics on the number of lost packets and packet loss ratio Collection of statistics on the number of lost packets and packet loss ratio at network and device levels |
| TWAMP | Two-way IP link performance measurement Measurement on two-way packet delay, one-way packet loss rate, and one-way packet jitter |
| Management and maintenance | iStack Virtual cable test |

| Feature | Description |
|---------|--|
| | SNMP v1/v2c/v3 |
| | RMON |
| | Web-based NMS |
| | System logs and alarms of different levels |
| | GVRP |
| | MUX VLAN |
| | 802.3az Energy Efficient Ethernet(EEE) |
| | NetStream |
| | Intelligent O&M |

Networking and Applications

Large enterprise campuses and branch/small campuses

Huawei S5730-HI is the next-generation fixed agile switch. The S5730-HI has large table sizes and buffers, avoiding packet loss in traffic bursts. It supports wired and wireless convergence and unified management on devices, users, and services. The S5730-HI can be used as the core device on an enterprise branch network or a small campus network or as the aggregation or access device on a large campus network, to achieve a manageable and reliable enterprise campus network with scalable services.

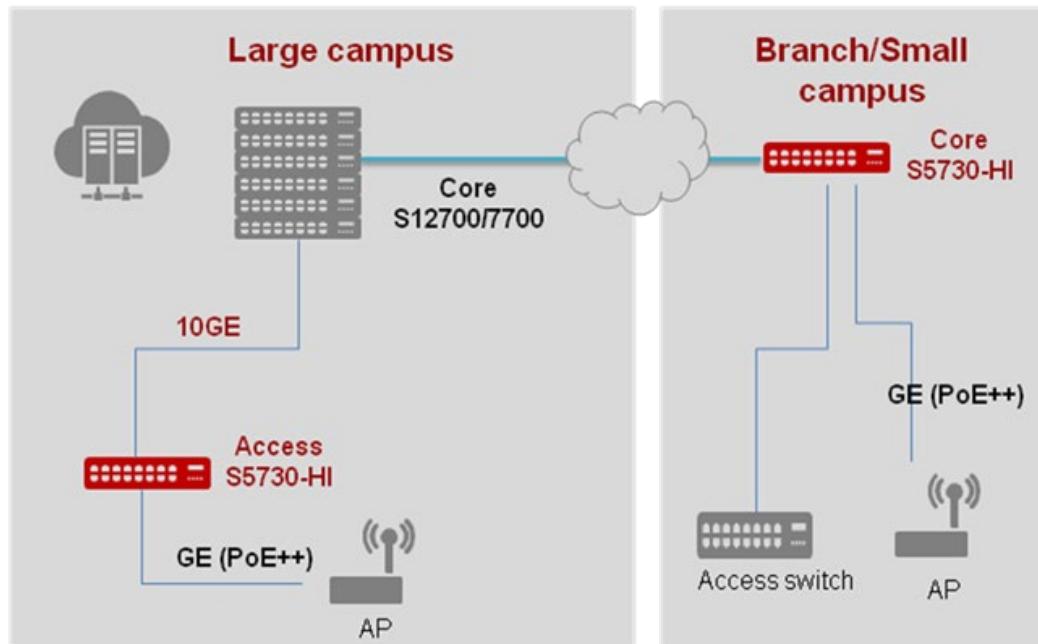

Ordering Information

The following table lists ordering information of the S5730-HI series switches.

| Model | Product Description |
|--------------|--|
| S5730-36C-HI | S5730-36C-HI(24*10/100/1000BASE-T ports, 4*10GE SFP+ ports, 1*expansion slot, without power module) |
| S5730-44C-HI | S5730-44C-HI(24*10/100/1000BASE-T ports, 4*10GE SFP+ ports, 2*expansion slots, without power module) |

| Model | Product Description |
|------------------|---|
| | power module) |
| S5730-36C-PWH-HI | S5730-36C-PWH-HI(24*10/100/1000BASE-T ports, 4*10GE SFP+ ports, 1*expansion slot, PoE++, without power module) |
| S5730-44C-PWH-HI | S5730-44C-PWH-HI(24*10/100/1000BASE-T ports, 4*10GE SFP+ ports, 2*expansion slots, PoE++, without power module) |
| S5730-36C-HI-24S | S5730-36C-HI-24S(24*GE SFP ports, 8 of which are dual-purpose 10/100/1000 or SFP, 4*10GE SFP+ ports, 1*expansion slot, without power module) |
| S5730-44C-HI-24S | S5730-44C-HI-24S(24*GE SFP ports, 8 of which are dual-purpose 10/100/1000 or SFP, 4*10GE SFP+ ports, 2*expansion slots, without power module) |
| S5730-60C-HI | S5730-60C-HI(48*10/100/1000BASE-T ports, 4*10GE SFP+ ports, 1*expansion slot, without power module) |
| S5730-68C-HI | S5730-68C-HI(48*10/100/1000BASE-T ports, 4*10GE SFP+ ports, 2*expansion slots, without power module) |
| S5730-60C-PWH-HI | S5730-60C-PWH-HI(48*10/100/1000BASE-T ports, 4*10GE SFP+ ports, 1*expansion slot, PoE++, without power module) |
| S5730-68C-PWH-HI | S5730-68C-PWH-HI(48*10/100/1000BASE-T ports, 4*10GE SFP+ ports, 2*expansion slots, PoE++, without power module) |
| S5730-60C-HI-48S | S5730-60C-HI-48S(48*GE SFP ports, 4*10GE SFP+ ports, 1*expansion slot, without power module) |
| S5730-68C-HI-48S | S5730-68C-HI-48S(48*GE SFP ports, 4*10GE SFP+ ports, 2*expansion slots, without power module) |
| ES0W2PSA0150 | 150W AC Power Module(Black) |
| ES0W2PSD0150 | 150W DC Power Module(Black) |
| PAC-500WA-BE | 500W AC PoE Power Module(Black, Power panel side exhaust) |
| PDC-650WA-BE | 650W DC PoE Power Module(Black, Power panel side exhaust) |
| PAC1000D5412 | 1000W AC PoE Power Module |
| W2PSA1150 | 1150W AC PoE Power Module |
| ES5D21Q02Q00 | 2-port 40GE QSFP+ interface card |
| ES5D21X08T00 | 8-port 10GE BASE-T interface card |
| ES5D21X08S00 | 8-port 10GE SFP+ interface card |
| SSD-240GB | 240GB SSD card |

More Information

For more information about Huawei Campus Switches, visit <http://e.huawei.com> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2019. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address:Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China

Website:e.huawei.com