

S1700 Series Enterprise Switches

Huawei S1700 series switches are next-generation energy-saving Ethernet access switches designed for small- and medium-sized enterprises, Internet cafes, hotels, and schools.

Product Overview

The S1700 series switches are easy to install and maintain and come with diverse service features, helping customers build secure, reliable, high-performance networks.

The S1700 series consists of unmanaged switches, web-managed switches, and fully-managed switches:

- Unmanaged switches:

Include S1700-16G, S1700-24-AC, S1700-24GR, S1724G-AC, S1700-52R-2T2P-AC, S1700-28GR-4X, and S1700-52GR-4X

- Web-managed switches:



Include S1720-10GW-2P, S1720-10GW-PWR-2P, S1720-28GWR-4P, S1720-28GWR-4X, S1720-28GWR-PWR-4P, S1720-28GWR-PWR-4TP, S1720-28GWR-PWR-4X, S1720-52GWR-4P, S1720-52GWR-4X, S1720-52GWR-PWR-4P, S1720-52GWR-PWR-4X, S1720X-16XWR, and S1720X-32XWR






- Fully-managed switches:

Include S1720-10GW-2P-E, S1720-10GW-PWR-2P-E, S1720-28GWR-4P-E, S1720-28GWR-4X-E, S1720-28GWR-PWR-4P-E, S1720-28GWR-PWR-4TP-E, S1720-28GWR-PWR-4X-E, S1720-52GWR-4P-E, S1720-52GWR-4X-E, S1720-52GWR-PWR-4P-E, S1720-52GWR-PWR-4X-E, S1720X-16XWR-E, and S1720X-32XWR-E




Models and Appearances


Unmanaged switches




Product Appearance	Description
 <p>S1700-16G</p>	<ul style="list-style-type: none"> ● 16 Ethernet 10/100/1000 ports ● AC power supply ● Forwarding performance: 24Mpps ● Switching Capacity: 32Gbps
 <p>S1700-24-AC</p>	<ul style="list-style-type: none"> ● 24 Ethernet 10/100 ports ● AC power supply ● Forwarding performance: 3.6Mpps ● Switching Capacity: 4.8Gbps

Product Appearance	Description
 <p>S1700-24GR</p>	<ul style="list-style-type: none"> • 24 Ethernet 10/100/1000 ports • AC power supply • Forwarding performance: 36Mpps • Switching Capacity: 48Gbps
 <p>S1724G-AC</p>	<ul style="list-style-type: none"> • 24 Ethernet 10/100/1000 ports • AC power supply • Forwarding performance: 36Mpps • Switching Capacity: 48Gbps
 <p>S1700-52R-2T2P-AC</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100 ports • Uplink: 2 Ethernet 10/100/1000 ports, 2 Gig SFP ports • AC power supply • Forwarding performance: 13.2Mpps • Switching Capacity: 17.6Gbps
 <p>S1700-28GR-4X</p>	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • AC power supply • Forwarding performance: 96Mpps • Switching Capacity: 168Gbps
 <p>S1700-52GR-4X</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • AC power supply • Forwarding performance: 132Mpps • Switching Capacity: 336Gbps






Web-managed switches









Product Appearance	Description
 <p>S1720-10GW-2P</p>	<ul style="list-style-type: none"> • Downlink: 8 Ethernet 10/100/1000 ports • Uplink: 2 Gig SFP ports • AC power supply • Forwarding performance: 15Mpps • Switching Capacity: 68Gbps
 <p>S1720-10GW-PWR-2P</p>	<ul style="list-style-type: none"> • Downlink: 8 Ethernet 10/100/1000 ports • Uplink: 2 Gig SFP ports • PoE+ • AC power supply • Forwarding performance: 15Mpps • Switching Capacity: 68Gbps
 <p>S1720-28GWR-4P</p>	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports • AC power supply • Forwarding performance: 42Mpps

Product Appearance	Description
 <p>S1720-28GWR-4X</p>	<ul style="list-style-type: none"> • Switching Capacity: 68Gbps • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • AC power supply • Forwarding performance: 96Mpps • Switching Capacity: 168Gbps
 <p>S1720-28GWR-PWR-4P</p>	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports • PoE+ • AC power supply • Forwarding performance: 42Mpps • Switching Capacity: 68Gbps
 <p>S1720-28GWR-PWR-4TP</p>	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP • PoE+ • AC power supply • Forwarding performance: 42Mpps • Switching Capacity: 68Gbps
 <p>S1720-28GWR-PWR-4X</p>	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • Support PoE+ • AC power supply • Forwarding performance: 96Mpps • Switching Capacity: 168Gbps
 <p>S1720-52GWR-4P</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports • AC power supply • Forwarding performance: 78Mpps • Switching Capacity: 336Gbps
 <p>S1720-52GWR-4X</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • AC power supply • Forwarding performance: 132Mpps • Switching Capacity: 336Gbps
 <p>S1720-52GWR-PWR-4P</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports • PoE+ • AC power supply • Forwarding performance: 78Mpps • Switching Capacity: 336Gbps
	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+

Product Appearance	Description
 S1720-52GWR-PWR-4X	<ul style="list-style-type: none"> • PoE+ • AC power supply • Forwarding performance: 132Mpps • Switching Capacity: 336Gbps
 S1720X-16XWR	<ul style="list-style-type: none"> • 16 10 Gig SFP+ • AC power supply • Forwarding performance: 240Mpps • Switching Capacity: 680Gbps
 S1720X-32XWR	<ul style="list-style-type: none"> • 32 10 Gig SFP+ • AC power supply • Forwarding performance: 252Mpps • Switching Capacity: 680Gbps

Fully-managed switches

Product Appearance	Description
 S1720-10GW-2P-E	<ul style="list-style-type: none"> • Uplink: 8 Ethernet 10/100/1000 ports • Downlink: 2 Gig SFP ports • AC power supply • Forwarding performance: 15Mpps • Switching Capacity: 68Gbps
 S1720-10GW-PWR-2P-E	<ul style="list-style-type: none"> • Downlink: 8 Ethernet 10/100/1000 ports • Uplink: 2 Gig SFP ports • PoE+ • AC power supply • Forwarding performance: 15Mpps • Switching Capacity: 68Gbps
 S1720-28GWR-4P-E	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports • AC power supply • Forwarding performance: 42Mpps • Switching Capacity: 68Gbps
 S1720-28GWR-4X-E	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • AC power supply • Forwarding performance: 96Mpps • Switching Capacity: 168Gbps
 S1720-28GWR-PWR-4P-E	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports • PoE+ • AC power supply • Forwarding performance: 42Mpps

Product Appearance	Description
 <p>S1720-28GWR-PWR-4TP-E</p>	<ul style="list-style-type: none"> • Switching Capacity: 68Gbps • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports, 2 of which are dual-purpose 10/100/1000 Base-t or SFP ports • PoE+ • AC power supply • Forwarding performance: 42Mpps • Switching Capacity: 68Gbps
 <p>S1720-28GWR-PWR-4X-E</p>	<ul style="list-style-type: none"> • Downlink: 24 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • Support PoE+ • AC power supply • Forwarding performance: 96Mpps • Switching Capacity: 168Gbps
 <p>S1720-52GWR-4P-E</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports • AC power supply • Forwarding performance: 78Mpps • Switching Capacity: 336Gbps
 <p>S1720-52GWR-4X-E</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • AC power supply • Forwarding performance: 132Mpps • Switching Capacity: 336Gbps
 <p>S1720-52GWR-PWR-4P-E</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 Gig SFP ports • PoE+ • AC power supply • Forwarding performance: 78Mpps • Switching Capacity: 336Gbps
 <p>S1720-52GWR-PWR-4X-E</p>	<ul style="list-style-type: none"> • Downlink: 48 Ethernet 10/100/1000 ports • Uplink: 4 10 Gig SFP+ • PoE+ • AC power supply • Forwarding performance: 132Mpps • Switching Capacity: 336Gbps
 <p>S1720X-16XWR-E</p>	<ul style="list-style-type: none"> • 16 10 Gig SFP+ • AC power supply • Forwarding performance: 240Mpps • Switching Capacity: 680Gbps
	<ul style="list-style-type: none"> • 32 10 Gig SFP+ • AC power supply

Product Appearance	Description
S1720X-32XWR-E	<ul style="list-style-type: none"> Forwarding performance: 252Mpps Switching Capacity: 680Gbps

Features and Highlights

Innovative Energy-saving Design

- The S1700 supports Energy Efficient Ethernet (EEE), which enables the switch to enter a power-saving mode when traffic is light.
- The S1700 can adjust the power output for transmissions based on the cable length. It can also set any ports that are not transmitting traffic to sleep mode.
- The models that use a fan-free design reduce power consumption and noise.

Non-blocking and High-speed Forwarding

- All S1700 ports provide Layer 2 wire-speed forwarding capabilities to ensure non-blocking packet forwarding. S1700 models provide optical and electrical GE uplink ports, which facilitate user access and are cost-effective.
- The S1700/S1720 MAC address table supports up to 8K/16K of MAC addresses, making it easy to expand networks and deploy new services. The S1700 support layer 3 static routing-forwarding which include IPv4 and IPv6 protocols.

Perpetual PoE

- When a PoE switch is rebooted after the software version is upgraded, the power supply to PDs is not interrupted. This capability ensures that PDs are not powered off during the switch reboot.

Convenient Management and Maintenance

- The S1700 is easy to manage and maintain, being equipped with a one-key operation button on the front panel.
- Web-managed S1700 models come with a web network management system, making it easy to configure switches.
- Fully-managed S1700 models allow for the use of an Simple Network Management Protocol (SNMP)-based Network Management System (NMS) for centralized configuration and management.

Intelligent O&M

- Web-managed and fully-manged S1700 models provide telemetry technology to collect device data in real time and send the data to Huawei campus network analyzer CampusInsight. The CampusInsight analyzes network data based on the intelligent fault identification algorithm, accurately displays the real-time network status, effectively demarcates and locates faults in a timely manner, and identifies network problems that affect user experience, accurately guaranteeing user experience.
- Web-managed and fully-manged S1700 models support a variety of intelligent O&M features for audio and video services, including the enhanced Media Delivery Index (eMDI). With this eMDI function, the switch can function as a monitored node to periodically conduct statistics and report audio and video service indicators to the CampusInsight platform. In this way, the CampusInsight platform can quickly demarcate audio and video service quality faults based on the results of multiple monitored nodes.

Powerful Security Performance

- The S1700 provides a range of security features, including 802.1x, RADIUS, Portal and NAC. The S1700 also supports packet filtering based on MAC addresses or ports in order to defend against hackers and virus attacks.

Great Networking and Bandwidth Extensibility

- The S1700 provides LACP, STP, RSTP and MSTP functions to implement link aggregation and backup. Fully-managed S1720 switches support up to 64 MSTP instances for flexible networking.

Product Specifications

Unmanaged switches

Item	S1700-16G S1724G-AC S1700-24GR	S1700-24-AC	S1700-28GR-4X	S1700-52GR-4X	S1700-52R-2T2P-AC
Downlink port	<ul style="list-style-type: none"> S1700-16G: 16 Ethernet 10/100/1000 ports S1724G-AC: 24 Ethernet 10/100/1000 ports S1700-24GR: 24 Ethernet 10/100/1000 ports 	24 Ethernet 10/100 ports	24 Ethernet 10/100/1000 ports	48 Ethernet 10/100/1000 ports	48 Ethernet 10/100 ports
Uplink port	Shared with downlink ports	Shared with downlink ports	4 10 Gig SFP+	4 10 Gig SFP+	2 Ethernet 10/100/1000 ports, 2 Gig SFP
MAC Address Table	8K MAC	8K MAC	16K MAC	16K MAC	8K MAC
Dimensions (W x D x H)	<ul style="list-style-type: none"> S1700-16G: 320 mm x 208 mm x 43.6 mm S1724G-AC: 320 mm x 208 mm x 43.6 mm S1700-24GR: 442 mm x 220 mm x 43.6 mm 	320 mm x 208 mm x 43.6 mm	442 mm x 220 mm x 43.6 mm	442 mm x 220 mm x 43.6 mm	442 mm x 220 mm x 43.6 mm
Input voltage	<ul style="list-style-type: none"> Rated AC power: 100 V-240 V AC, 50–60 Hz Max AC voltage: 90 V-264 V AC, 47–63 Hz 	<ul style="list-style-type: none"> Rated AC power: 100 V-240 V AC, 50–60 Hz Max AC voltage: 90 V-264 V AC, 47–63 Hz 	<ul style="list-style-type: none"> Rated AC power: 100 V-240 V AC, 50–60 Hz Max AC voltage: 90 V-264 V AC, 47–63 Hz 	<ul style="list-style-type: none"> Rated AC power: 100 V-240 V AC, 50–60 Hz Max AC voltage: 90 V-264 V AC, 47–63 Hz 	<ul style="list-style-type: none"> Rated AC power: 100 V-240 V AC, 50–60 Hz Max AC voltage: 90 V-264 V AC, 47–63 Hz
Power Consumption	<ul style="list-style-type: none"> S1700-16G: <10 W S1724G-AC: <14.2 W S1720-24GR: <14.2 W 	<3.9 W	<44.6 W	<44.6 W	<22.6 W
Operating temperature	0°C–45°C	0°C–45°C	0°C–45°C	0°C–45°C	0°C–45°C
Humidity (non-condensing)	5%–95%	5%–95%	5%–95%	5%–95%	10%–90%

Item	S1700-16G S1724G-AC S1700-24GR	S1700-24-AC	S1700-28GR-4X	S1700-52GR-4X	S1700-52R- 2T2P-AC
Heat dissipation	Nature heat dissipation without fan	Nature heat dissipation without fan	Nature heat dissipation without fan	Heat dissipation without fan	Nature heat dissipation without fan

Web-managed switches

Item	S1720-10GW-2P S1720-10GW-PWR-2P	S1720-28GWR-4P S1720-28GWR- PWR-4P	S1720-28GWR-4X S1720-28GWR- PWR-4X	S1720-28GWR- PWR-4TP
Downlink port	8 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports
Uplink port	2 Gig SFP	4 Gig SFP	4 10 Gig SFP+	4 Gig SFP, 2 dual-purpose 10/100/1000 or SFP
MAC Address Table	16K MAC	16K MAC	16K MAC	16K MAC
Routing Feature	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing
Dimensions (W x D x H)	<ul style="list-style-type: none"> 250 mm x 180 mm x 43.6 mm 320 mm x 220 mm x 43.6 mm (PoE) 	<ul style="list-style-type: none"> 442 mm x 220 mm x 43.6 mm 442 mm x 310 mm x 43.6 mm (PoE) 	<ul style="list-style-type: none"> 442 mm x 220 mm x 43.6 mm 442 mm x 310 mm x 43.6 mm (PoE) 	442 mm x 220 mm x 43.6 mm
Input voltage	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz
EEE	Supported	Supported	Supported	Supported
Power Consumption	<ul style="list-style-type: none"> Non-PoE model: 11.86 W PoE model: <ul style="list-style-type: none"> Without PD: 14.63 W With PD: 159.2 W (PoE: 123.2 W) 	<ul style="list-style-type: none"> Non-PoE model: 20.2 W PoE model: <ul style="list-style-type: none"> Without PD: 40.4 W With PD: 446.7 W (PoE: 370 W) 	<ul style="list-style-type: none"> Non-PoE model: 27.9 W PoE model: <ul style="list-style-type: none"> Without PD: 42.7 W With PD: 448.5 W (PoE: 370 W) 	<ul style="list-style-type: none"> Without PD: 24.4 W With PD: 165.528 W (PoE: 123.2 W)
Operating temperature	0°C–45°C	0°C–45°C	0°C–45°C	0°C–45°C
Humidity (non-condensing)	5%–95%	5%–95%	5%–95%	5%–95%
Heat dissipation	Fan-free natural heat dissipation	<ul style="list-style-type: none"> Non-PoE model: Fan-free natural heat dissipation PoE model: Heat dissipation using fans supporting intelligent speed adjustment 	<ul style="list-style-type: none"> None-PoE model: Fan-free natural heat dissipation PoE model: Heat dissipation using fans supporting intelligent speed adjustment 	Fan-free natural heat dissipation

Item	S1720-52GWR-4P S1720-52GWR-PWR-4P	S1720-52GWR-4X S1720-52GWR-PWR-4X	S1720X-16XWR	S1720X-32XWR
Downlink port	48 Ethernet 10/100/1000 ports	48 Ethernet 10/100/1000 ports	16 10 Gig SFP+	32 10 Gig SFP+
Uplink port	4 Gig SFP	4 10 Gig SFP+		
MAC Address Table	16K MAC	16K MAC	32K MAC	32K MAC
Routing Feature	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing
Dimensions (W x D x H)	<ul style="list-style-type: none"> 442 mm x 220 mm x 43.6 mm 442 mm x 310 mm x 43.6 mm (PoE) 	<ul style="list-style-type: none"> 442 mm x 220 mm x 43.6 mm 442 mm x 310 mm x 43.6 mm (PoE) 	420 mm x 220 mm x 43.6 mm	420 mm x 220 mm x 43.6 mm
Input voltage	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz
EEE	Supported	Supported	Supported	Supported
Power Consumption	<ul style="list-style-type: none"> Non-PoE model: 47.3 W PoE model: <ul style="list-style-type: none"> Without PD: 61.7 W With PD: 461.8 W (PoE: 370 W) 	<ul style="list-style-type: none"> Non-PoE model: 50.3 W PoE model: <ul style="list-style-type: none"> Without PD: 63.5 W With PD: 464.3 W (PoE: 370 W) 	63.1 W	103.6 W
Operating temperature	0°C–45°C	0°C–45°C	0°C–45°C	0°C–45°C
Humidity (non-condensing)	5%–95%	5%–95%	5%–95%	5%–95%
Heat dissipation	Heat dissipation using fans supporting intelligent speed adjustment	Heat dissipation using fans supporting intelligent speed adjustment	Heat dissipation using fans supporting intelligent speed adjustment	Heat dissipation using fans supporting intelligent speed adjustment

Fully-managed switches

Item	S1720-10GW-2P-E S1720-10GW-PWR-2P-E	S1720-28GWR-4P-E S1720-28GWR-PWR-4P-E	S1720-28GWR-4X-E S1720-28GWR-PWR-4X-E	S1720-28GWR-PWR-4TP-E
Downlink port	8 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports
Uplink port	2 Gig SFP	4 Gig SFP	4 10 Gig SFP+	4 Gig SFP, 2 dual-purpose 10/100/1000 or SFP
MAC ADDRESS	16K MAC	16K MAC	16K MAC	16K MAC

Item	S1720-10GW-2P-E S1720-10GW-PWR-2P-E	S1720-28GWR-4P-E S1720-28GWR-PWR-4P-E	S1720-28GWR-4X-E S1720-28GWR-PWR-4X-E	S1720-28GWR-PWR-4TP-E
TABLE				
Routing Feature	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing
Dimensions (W x D x H)	<ul style="list-style-type: none"> 250 mm x 180 mm x 43.6 mm 320 mm x 220 mm x 43.6 mm (PoE) 	<ul style="list-style-type: none"> 442 mm x 220 mm x 43.6 mm 442 mm x 310 mm x 43.6 mm (PoE) 	<ul style="list-style-type: none"> 442 mm x 220 mm x 43.6 mm 442 mm x 310 mm x 43.6 mm (PoE) 	442 mm x 220 mm x 43.6 mm
Input voltage	100 V-240 V AC, 50–60Hz	100 V-240 V AC, 50–60Hz	100 V-240 V AC, 50–60Hz	100 V-240 V AC, 50–60Hz
EEE	Supported	Supported	Supported	Supported
Power Consumption	<ul style="list-style-type: none"> Non-PoE models: 11.86 W PoE models: <ul style="list-style-type: none"> Without PD :14.63 W With PD: 159.2 W (PoE: 123.2 W) 	<ul style="list-style-type: none"> Non-PoE models: 20.2 W PoE models: <ul style="list-style-type: none"> Without PD: 40.4 W With PD: 446.7 W (PoE: 370 W) 	<ul style="list-style-type: none"> Non-PoE model: 27.9 W PoE model: <ul style="list-style-type: none"> Without PD: 42.7 W With PD: 448.5 W (PoE: 369.6 W) 	<ul style="list-style-type: none"> Without PD: 24.4 W With PD: 165.528 W (PoE: 123.2 W)
Operating temperature	0°C–45°C	0°C–45°C	0°C–45°C	0°C–45°C
Humidity (non-condensing)	5%–95%	5%–95%	5%–95%	5%–95%
Heat dissipation	Fan-free natural heat dissipation	<ul style="list-style-type: none"> Non-PoE models: Fan-free natural heat dissipation PoE models: Heat dissipation using fans supporting intelligent speed adjustment 	<ul style="list-style-type: none"> Non-PoE model: Fan-free natural heat dissipation PoE model: Heat dissipation using fans supporting intelligent speed adjustment 	Fan-free natural heat dissipation

Item	S1720-52GWR-4P-E S1720-52GWR-PWR-4P-E	S1720-52GWR-4X-E S1720-52GWR-PWR-4X-E	S1720X-16XWR-E	S1720X-32XWR-E
Downlink port	48 Ethernet 10/100/1000 ports	48 Ethernet 10/100/1000 ports	16 10 Gig SFP+	32 10 Gig SFP+
Uplink port	4 Gig SFP	4 10 Gig SFP+		
MAC Address Table	16K MAC	16K MAC	32K MAC	32K MAC
Routing Feature	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing	Support IPv4, IPv6 static routing
Dimensions (W x D x H)	<ul style="list-style-type: none"> 442 mm x 220 mm x 43.6 mm 	<ul style="list-style-type: none"> 442 mm x 220 mm x 43.6 mm 	420 mm x 220 mm x 43.6 mm	420 mm x 220 mm x 43.6 mm

Item	S1720-52GWR-4P-E S1720-52GWR-PWR-4P-E	S1720-52GWR-4X-E S1720-52GWR-PWR-4X-E	S1720X-16XWR-E	S1720X-32XWR-E
	<ul style="list-style-type: none"> 442 mm x 310 mm x 43.6 mm (PoE) 	<ul style="list-style-type: none"> 442 mm x 310 mm x 43.6 mm (PoE) 		
Input voltage	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz	100 V-240 V AC, 50–60 Hz
EEE	Supported	Supported	Supported	Supported
Power Consumption	<ul style="list-style-type: none"> Non-PoE models: 47.3 W PoE models: <ul style="list-style-type: none"> Without PD: 61.7 W With PD: 461.8 W (PoE: 369.6 W) 	<ul style="list-style-type: none"> Non-PoE model: 50.3 W PoE model: <ul style="list-style-type: none"> Without PD: 63.5 W With PD: 464.3 W (PoE: 369.6 W) 	63.1 W	103.6 W
Operating temperature	0°C–45°C	0°C–45°C	0°C–45°C	0°C–45°C
Humidity (non-condensing)	5%–95%	5%–95%	5%–95%	5%–95%
Heat dissipation	Heat dissipation using fans supporting intelligent speed adjustment	Heat dissipation using fans supporting intelligent speed adjustment	Heat dissipation using fans supporting intelligent speed adjustment	Heat dissipation using fans supporting intelligent speed adjustment


Service Features

Item	Web-managed Switch	Fully-managed Switch
Security features	<ul style="list-style-type: none"> Packet filtering based on MAC addresses MAC address authentication Port-based 802.1x authentication RADIUS authentication Portal authentication Port isolation Storm suppression DHCP snooping 	<ul style="list-style-type: none"> Hardware ACL Packet filtering based on MAC addresses MAC address authentication Port-based 802.1x authentication. RADIUS authentication Portal authentication Port isolation Storm suppression Attack defense, which prevents broadcast traffic, ARP attacks, ICMP attacks, TCP attacks, worm viruses, and DoS attacks DHCP snooping
VLANs	<ul style="list-style-type: none"> 4K VLANs Access port Trunk port Hybrid port Management VLAN Voice VLAN 	<ul style="list-style-type: none"> 4K VLANs Access port Trunk port Hybrid port Management VLAN Voice VLAN


Item	Web-managed Switch	Fully-managed Switch
QoS	PQ and WRR Eight queues on each port Queue scheduling based on 802.1p or DSCP priorities	PQ and WRR Eight queues on each port Queue scheduling based on 802.1p or DSCP priorities
STP	STP (IEEE 802.1d) RSTP (IEEE 802.1w) MSTP (IEEE 802.1s)	STP (IEEE 802.1d) RSTP (IEEE 802.1w) MSTP (IEEE 802.1s)
Multicast	IGMP snooping and a maximum of 1K multicast groups Fast leave	IGMP snooping and a maximum of 1K multicast groups Fast leave
Routing feature	IPv4 and IPv6 static routing	IPv4 and IPv6 static routing
Link aggregation	64 link aggregation groups (LAGs) with a maximum of eight ports in each LAG Static LACP	64 link aggregation groups Static LACP
Port mirroring	Port-based bidirectional flow mirroring	Port-based bidirectional flow mirroring
Broadcast storm suppression	Broadcast storm suppression based on the interface rate Alarm sending when the traffic rate reaches the upper limit	Broadcast storm suppression based on the interface rate Alarm sending when the traffic rate reaches the upper limit
Device management	Web system network management DHCP client One-key restoration NOTE You can upgrade the web-managed S1720 model to the fully-managed model by purchasing a license.	SNMP Web system network management (HTTPS) DHCP client User password protection One-key restoration CLI configuration
Device maintenance	System log Ping Virtual Cable Test (VCT) Link Layer Discovery Protocol (LLDP)	Remote Network Monitoring (RMON) System log Ping and traceroute Virtual Cable Test (VCT) Link Layer Discovery Protocol (LLDP)

Networking and Applications

Hotel Scenarios

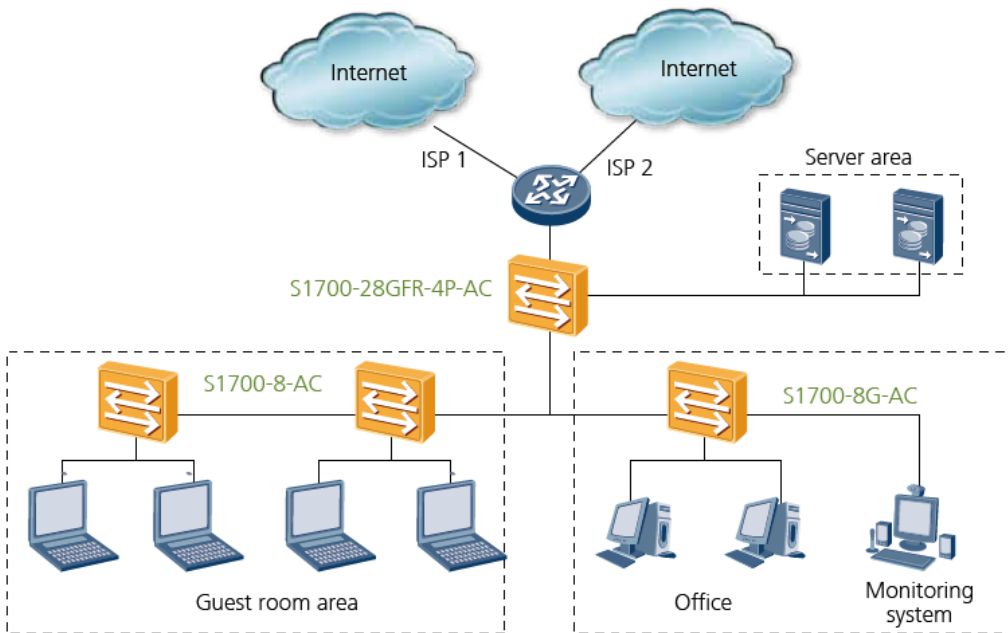

School Scenarios

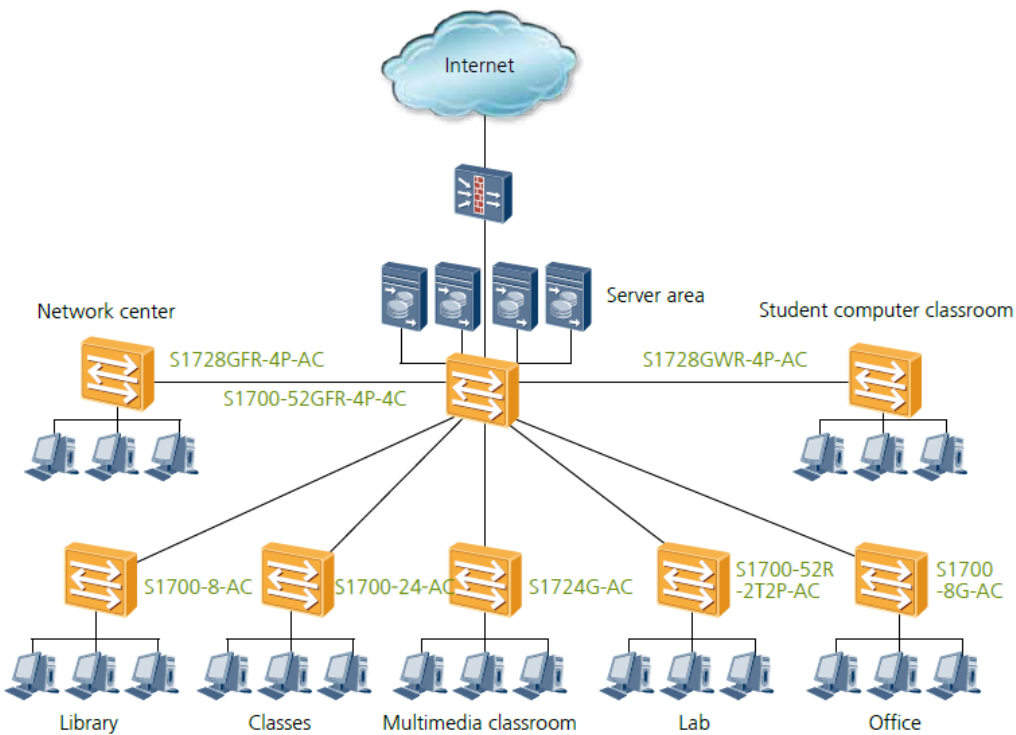

Ordering Information

The following table lists ordering information of the S1700 series switches.

Part Number	Description
-------------	-------------

Part Number	Description
98010542	S1700-16G (16 Ethernet 10/100/1000 ports, AC 110/220V)
98010455	S1700-24-AC (24 Ethernet 10/100 ports, AC 110/220V)
98010436	S1724G-AC (24 Ethernet 10/100/1000 ports, AC 110/220V)
98010495	S1700-24GR (24 Ethernet 10/100/1000 ports, AC 110/220V)
98010456	S1700-52R-2T2P-AC (48 Ethernet 10/100 ports, 2 Ethernet 10/100/1000 ports and 2 Gig SFP, AC 110/220V)
98010642	S1700-52GR-4X (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, AC 110/220V)
98010641	S1700-28GR-4X (24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, AC 110/220V)
98010574	S1720-10GW-2P (8 Ethernet 10/100/1000 ports, 2 Gig SFP, AC 110/220V)
98010576	S1720-10GW-PWR-2P (8 Ethernet 10/100/1000 PoE+ ports, 2 Gig SFP, AC 110/220V)
98010580	S1720-28GWR-4P (24 Ethernet 10/100/1000 ports, 4 Gig SFP, AC 110/220V)
98010587	S1720-28GWR-4X (24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, AC 110/220V)
98010592	S1720-28GWR-PWR-4P (24 Ethernet 10/100/1000 PoE+ ports, 4 Gig SFP, 370W PoE AC 110/220V)
98010599	S1720-28GWR-PWR-4X (24 Ethernet 10/100/1000 PoE+ ports, 4 10 Gig SFP+, 370W PoE AC 110/220V)
98010610	S1720-52GWR-4P (48 Ethernet 10/100/1000 ports, 4 Gig SFP, AC 110/220V)
98010611	S1720-52GWR-4X (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, AC 110/220V)
98010623	S1720-52GWR-PWR-4P (48 Ethernet 10/100/1000 PoE+ ports, 4 Gig SFP, 370W PoE AC 110/220V)
98010624	S1720-52GWR-PWR-4X (48 Ethernet 10/100/1000 PoE+ ports, 4 10 Gig SFP+, 370W PoE AC 110/220V)
98010636	S1720-28GWR-PWR-4TP (24 Ethernet 10/100/1000, 2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP, 8 ports PoE+, 124W PoE AC)
98010689	S1720X-16XWR (16 10Gig SFP+, AC110/220V)
98010697	S1720X-32XWR (32 10Gig SFP+, AC110/220V)
98010753	S1720-10GW-2P-E (8 Ethernet 10/100/1000 ports, 2 Gig SFP, with license, AC 110/220V)
98010754	S1720-10GW-PWR-2P-E (8 Ethernet 10/100/1000 PoE+ ports, 2 Gig SFP, with license, AC 110/220V)
98010744	S1720-28GWR-4P-E (24 Ethernet 10/100/1000 ports, 4 Gig SFP, with license, AC 110/220V)
98010745	S1720-28GWR-4X-E (24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, with license, AC 110/220V)
98010748	S1720-28GWR-PWR-4P-E (24 Ethernet 10/100/1000 ports, 4 Gig SFP, PoE+, with license, 370W PoE AC 110/220V)
98010749	S1720-28GWR-PWR-4X-E (24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, PoE+, with license, 370W PoE AC 110/220V)
98010746	S1720-52GWR-4P-E (48 Ethernet 10/100/1000 ports, 4 Gig SFP, with license, AC 110/220V)
98010747	S1720-52GWR-4X-E (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, with license, AC 110/220V)
98010750	S1720-52GWR-PWR-4P-E (48 Ethernet 10/100/1000 ports, 4 Gig SFP, PoE+, with license, 370W PoE AC 110/220V)
98010751	S1720-52GWR-PWR-4X-E (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, PoE+, with license, 370W PoE AC 110/220V)

Part Number	Description
98010752	S1720-28GWR-PWR-4TP-E (24 Ethernet 10/100/1000, 2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP, 8 ports PoE+, with license, 124W PoE AC, front access)
98010760	S1720X-16XWR-E (16 10Gig SFP+, with license, AC110/220V)
98010761	S1720X-32XWR-E (32 10Gig SFP+, with license, AC110/220V)

More Information


For more information about Huawei Campus Switches, visit <http://e.huawei.com> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2019. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China

Website: e.huawei.com